


扣压式软管接头

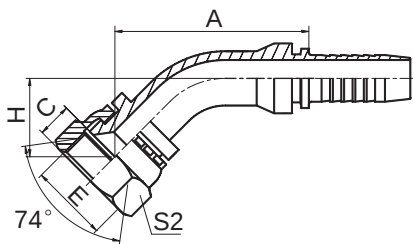

KF20741

45° 国标公制内螺纹 74° 内锥面
45° GB METRIC FEMALE 74° CONE SEAT
参考 REF. GB/T 9065.1

代 号 PART NO.	螺 纹 E THREAD E	胶 管 HOSE BORE		尺 寸 DIMENSIONS			
		公称内径 DN	标号 DASH	A	C	H	S2
KF20741-14-04	M14X1.5	6	04	40.5	8.5	18.5	19
KF20741-16-05	M16X1.5	8	05	44.4	8	20	22
KF20741-18-06	M18X1.5	10	06	45.7	10	21.4	24
KF20741-22-08	M22X1.5	12	08	58.9	10	24	27
KF20741-27-10	M27X1.5	16	10	70.7	11	26.4	32
KF20741-30-12	M30X1.5	20	12	78.1	11	30	36
KF20741-33-12	M33X2	20	12	77.4	13	30	41
KF20741-33-16	M33X2	25	16	85	13	30.8	41
KF20741-36-14	M36X2	22	14	79.8	14	29.6	41
KF20741-36-16	M36X2	25	16	85.7	14	31.5	41
KF20741-39-16	M39X2	25	16	86.1	14	31.8	46
KF20741-45-20W	M45X2	32	20	97	15	36.2	55
KF20741-52-24W	M52X2	40	24	115.3	17	40.9	60

注： 1. 表中代号用于编织软管。 2. 如需用于缠绕软管代号改为 20742-xx-xx。
Note: 1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is 20742-xx-xx.