




扣压式软管接头



KF22641

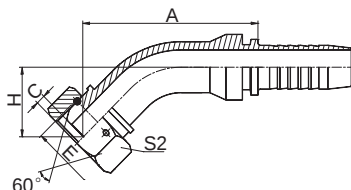

KF22641-W



KF22641-T

45° 英管内螺纹 60° 外锥面
45° BSP FEMALE 60° CONE

代 号 PART NO.	螺 纹 E THREAD E	胶 管 HOSE BORE			尺 寸 DIMENSIONS			
		公称内径 DN	标号 DASH		A	C	H	S2
KF22641-04-04	G1/4"X19	6	04		42.3	5.5	20.2	19
KF22641-06-04	G3/8"X19	6	04		43.2	6.3	21	22
KF22641-06-05	G3/8"X19	8	05		45.3	6.3	22	22
KF22641-06-06	G3/8"X19	10	06		46.9	6.3	22.6	22
KF22641-08-06T	G1/2"X14	10	06		48.1	7.5	23.9	27
KF22641-08-08	G1/2"X14	12	08		61.1	7.5	26.1	27
KF22641-10-08	G5/8"X14	12	08		61.4	9.5	26.5	30
KF22641-10-10	G5/8"X14	16	10		72.6	9.5	27.8	30
KF22641-12-08T	G3/4"X14	12	08		61.8	10.9	26.9	32
KF22641-12-10	G3/4"X14	16	10		73	10.9	28.2	32
KF22641-12-12	G3/4"X14	20	12		79.2	10.9	31.8	32
KF22641-16-12T	G1"X11	20	12		80.8	11.7	33.4	41
KF22641-16-16	G1"X11	25	16		88.4	11.7	34.2	41
KF22641-20-16T	G1.1/4"X11	25	16		85.3	11	31.1	50
KF22641-20-20W	G1.1/4"X11	32	20		98.8	11	38	50
KF22641-24-24W	G1.1/2"X11	40	24		116.8	13	45.5	55
KF22641-32-32W	G2"X11	50	32		135.7	16	52.7	70
注： 1. 表中代号用于编织软管。 2. 如需用于缠绕软管代号改为 22642-xx-xx。 Note: 1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is 22642-xx-xx.								