


美制螺纹74°锥面扩口接头

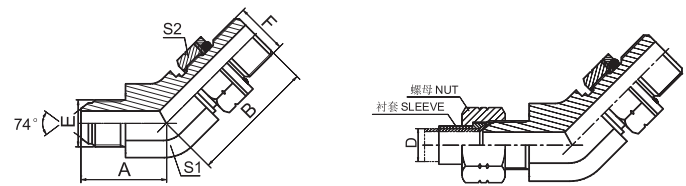

KF1JG4-OG

45° 弯美制 JIC 外螺纹 74° 外锥 / 英管外螺纹 O 形圈
45° ELBOW JIC MALE 74° CONE / BSP MALE O-RING

代 号 PART NO.	螺 纹 THREAD		O 形圈 O-RING		尺 寸 DIMENSIONS				
	E	F		F 端	A	B	S1	S2	
KF1JG4-04OG	7/16"X20	G1/4"X19		O111	21	28	14	19	
KF1JG4-05-04OG	1/2"X20	G1/4"X19		O111	21	28	14	19	
KF1JG4-06-04OG	9/16"X18	G1/4"X19		O111	22	28	14	19	
KF1JG4-06OG	9/16"X18	G3/8"X19		O113	23	32	19	22	
KF1JG4-08-06OG	3/4"X16	G3/8"X19		O113	25.8	32	19	22	
KF1JG4-08OG	3/4"X16	G1/2"X14		O115	27.5	36	22	27	
KF1JG4-10-08OG	7/8"X14	G1/2"X14		O115	29.5	38	22	27	
KF1JG4-10OG	7/8"X14	G5/8"X14		O910	29.5	38	22	30	
KF1JG4-12-10OG	1.1/16"X12	G5/8"X14		O910	34	38.5	27	30	
KF1JG4-12-16OG	1.1/16"X12	G1"X11		O217	37.5	44	33	41	
KF1JG4-12OG	1.1/16"X12	G3/4"X14		O119	34	42	27	32	
KF1JG4-16-12OG	1.5/16"X12	G3/4"X14		O119	38	44	33	32	
KF1JG4-16OG	1.5/16"X12	G1"X11		O217	38	44	33	41	
KF1JG4-20OG	1.5/8"X12	G1.1/4"X11		O222	43	47.5	41	50	
KF1JG4-24OG	1.7/8"X12	G1.1/2"X11		O224	49	51.5	48	55	
注：1 螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 2 F 端与 DIN 3852 油口相配。 Note: 1 Nut and sleeve should be ordered separately.The nut NB200 and sleeve NB500 is suitable for metric tube,the nut NB200 and sleeve NB300 is suitable for inch tube. 2 F end is connected with DIN 3852 port.									