


扣压式软管接头

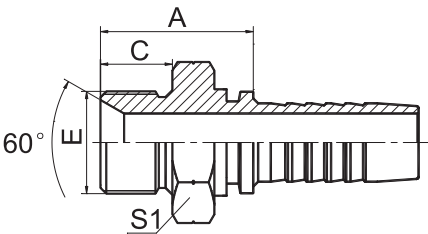

KF12611A

英管外螺纹 60° 内锥面或六角端面
用组合垫密封的双用接头
BSP MALE DOUBLE USE FOR 60°
CONE SEAT OR BONDED SEAL

代 号 PART NO.	螺 纹 E THREAD E	胶 管 HOSE BORE		尺 寸 DIMENSIONS					
		公称内径 DN	标号 DASH		A	C	S1		
KF12611A-02-03	G1/8"X28	5	03		22	10	14		
KF12611A-04-04	G1/4"X19	6	04		24.5	12	19		
KF12611A-04-05	G1/4"X19	8	05		24.5	12	19		
KF12611A-06-05	G3/8"X19	8	05		26	13.5	22		
KF12611A-06-06	G3/8"X19	10	06		28	13.5	22		
KF12611A-06-08	G3/8"X19	12	08		28.5	13.5	22		
KF12611A-08-06	G1/2"X14	10	06		33	16	27		
KF12611A-08-08	G1/2"X14	12	08		33.5	16	27		
KF12611A-08-10	G1/2"X14	16	10		32	16	27		
KF12611A-10-08	G5/8"X14	12	08		35	17.5	30		
KF12611A-10-10	G5/8"X14	16	10		36	17.5	30		
KF12611A-12-08	G3/4"X14	12	08		36.5	18.5	32		
KF12611A-12-10	G3/4"X14	16	10		37.5	18.5	32		
KF12611A-12-12	G3/4"X14	20	12		37.5	18.5	32		
KF12611A-16-12	G1"X11	20	12		42.5	20.5	41		
KF12611A-16-16	G1"X11	25	16		43.5	20.5	41		
KF12611A-20-16	G1.1/4"X11	25	16		45.5	20.5	50		
KF12611A-20-20	G1.1/4"X11	32	20		46.5	20.5	50		
KF12611A-24-24	G.1/2"X11	40	24		49	23	55		
KF12611A-32-32	G2"X11	50	32		54.5	25.5	70		

注：该系列的密封型式可采用 60° 锥面密封，也可在六角端面放组合垫密封。