


扣压式软管接头

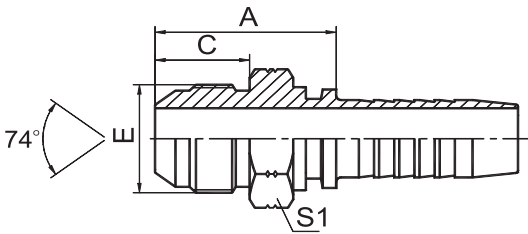

KF16711

美制 JIC 外螺纹 74° 外锥面
JIC MALE 74° CONE
ISO 8434-2--SAE J514

代 号 PART NO.	螺 纹 E THREAD E	胶 管 HOSE BORE		尺 寸 DIMENSIONS		
		公称内径 DN	标号 DASH	A	C	S1
KF16711-04-03	7/16"X20	5	03	26	14	12
KF16711-04-04	7/16"X20	6	04	26.5	14	12
KF16711-05-04	1/2"X20	6	04	26.5	14	14
KF16711-05-05	1/2"X20	8	05	26.5	14	14
KF16711-05-06	1/2"X20	10	06	26.5	14	17
KF16711-06-04	9/16"X18	6	04	26.5	14.1	17
KF16711-06-05	9/16"X18	8	05	26.5	14.1	17
KF16711-06-06	9/16"X18	10	06	26.5	14.1	17
KF16711-08-06	3/4"X16	10	06	31.5	16.7	22
KF16711-08-08	3/4"X16	12	08	32	16.7	22
KF16711-10-06	7/8"X14	10	06	33.5	19.3	24
KF16711-10-08	7/8"X14	12	08	34	19.3	24
KF16711-10-10	7/8"X14	16	10	35	19.3	24
KF16711-12-08	1.1/16"X12	12	08	38.5	21.9	30
KF16711-12-10	1.1/16"X12	16	10	39.5	21.9	30
KF16711-12-12	1.1/16"X12	20	12	40	21.9	30
KF16711-12-16	1.1/16"X12	25	16	42	21.9	30
KF16711-14-10	1.3/16"X12	16	10	41.5	22.6	32
KF16711-14-12	1.3/16"X12	20	12	40.5	22.6	32
KF16711-16-12	1.5/16"X12	20	12	43	23.1	36
KF16711-16-16	1.5/16"X12	25	16	43.5	23.1	36
KF16711-20-16	1.5/8"X12	25	16	47	24.3	46
KF16711-20-20	1.5/8"X12	32	20	47.5	24.3	46
KF16711-24-20	1.7/8"X12	32	20	53	27.5	50
KF16711-24-24	1.7/8"X12	40	24	53	27.5	50
KF16711-32-32	2.1/2"X12	50	32	62	33.9	65
注：1.上述代号用于编织软管。 2.如需用于缠绕软管代号改为16712-xx-xx。 Note: 1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is 16712-xx-xx.						