



扣压式软管接头

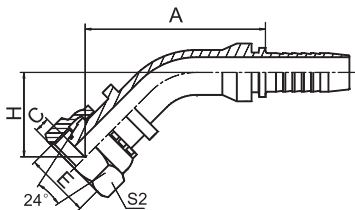

KF20441

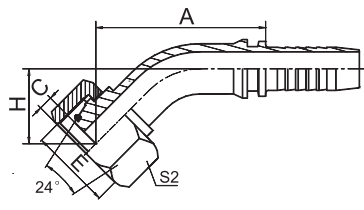

KF20441-T

45° 公制内螺纹 24° 锥带 O 形圈轻系列
45° METRIC FEMALE 24° CONE O-RING L.T.
ISO 12151-2—DIN 3865

代 号 PART NO.	螺 纹 E THREAD E	胶 管 HOSE BORE		管子外径 TUBE O.D.	O 形 圈 O RING	尺 寸 DIMENSIONS			
		公称内径 DN	标号 DASH			A	C	H	S2
KF20441-14-04	M14X1.5	6	04	8	O06.5X1.5	49	2	27	19
KF20441-16-05	M16X1.5	8	05	10	O08.0X1.5	51.5	2	28.2	22
KF20441-16-06	M16X1.5	10	06	10	O08.0X1.5	53.4	2	29.2	22
KF20441-18-05T	M18X1.5	8	05	12	O10.0X1.5	46.6	1.5	23.2	22
KF20441-18-06	M18X1.5	10	06	12	O10.0X1.5	54.2	2.5	29.9	24
KF20441-22-05T	M22X1.5	8	05	15	O12.0X2.0	46.5	3	23.2	27
KF20441-22-06T	M22X1.5	10	06	15	O12.0X2.0	48.5	3	24.2	27
KF20441-22-08	M22X1.5	12	08	15	O12.0X2.0	68.1	2.5	33.2	27
KF20441-26-08T	M26X1.5	12	08	18	O15.0X2.0	60.6	2.1	25.7	32
KF20441-26-10	M26X1.5	16	10	18	O15.0X2.0	80.7	2.5	35.9	32
KF20441-26-12	M26X1.5	20	12	18	O15.0X2.0	86.9	2.5	39.5	32
KF20441-27-10T	M27X1.5	16	10	18	O15.0X2.0	72	2.1	27.7	32
KF20441-27-12	M27X1.5	20	12	18	O15.0X2.0	86.9	2.5	39.5	32
KF20441-30-10T	M30X2	16	10	22	O20.0X2.0	73.5	3.8	28.6	36
KF20441-30-12	M30X2	20	12	22	O20.0X2.0	89.1	4	41.7	36
KF20441-36-12T	M36X2	20	12	28	O26.0X2.0	79.5	4.5	32.1	46
KF20441-36-14T	M36X2	22	14	28	O26.0X2.0	81.9	4.5	31.6	46
KF20441-45-20T	M45X2	32	20	35	O32.0X2.5	99.8	4	39.1	55
KF20441-52-20T	M52X2	32	20	42	O38.0X2.5	102	4	39.8	60
KF20441-52-24T	M52X2	40	24	42	O38.0X2.5	114.5	4	43.7	60

注： 1. 表中代号用于编织软管。 2. 如需用于缠绕软管代号改为 20442-xx-xx。
Note: 1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is 20442-xx-xx.