


DIN卡套式管接头

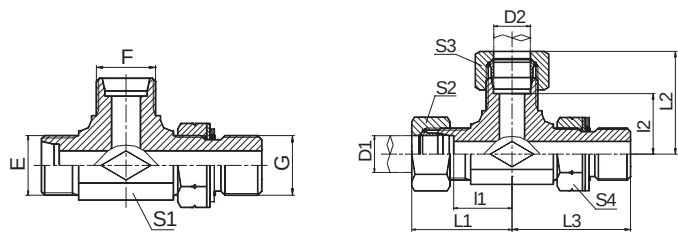

KFACCH-OG
KFADDH-OG

KFACCH-OG/RN
KFADDH-OG/RN

三通公制外螺纹 24° 锥 / 公制外螺纹可调向柱端 ISO 6149-2
METRIC MALE 24° CONE / METRIC MALE
ADJUSTABLE STUD END ISO 6149-2
RUN TEE

代 号 PART NO.	螺 纹 THREAD		管子外径 D1,D2 TUBE O.D.	O 形 圈 O RING	尺 寸 DIMENSIONS						压力等级 MPa
	E,F	G			I,J2	L1,L2	L3	S1	S2,S3	S4	
KFACCH-12-12-10OG	M12X1.5	M10X1	6	O08.1X1.6	13	28	26.5	11	14	14	31.5 轻系列 L
KFACCH-14-14-12OG	M14X1.5	M12X1.5	8	O09.3X2.4	15.5	30.5	32	14	17	17	
KFACCH-16-16-14OG	M16X1.5	M14X1.5	10	O11.3X2.4	17.5	32.5	34	16	19	19	
KFACCH-18-18-16OG	M18X1.5	M16X1.5	12	O13.3X2.4	19	34	36	19	22	22	
KFACCH-22-22-18OG	M22X1.5	M18X1.5	15	O15.3X2.4	22	37	39.5	22	27	24	
KFACCH-26-26-22OG	M26X1.5	M22X1.5	18	O19.3X2.4	25.5	42	43.5	27	32	27	
KFACCH-30-30-27OG	M30X2	M27X2	22	O23.5X3.0	29.3	45.8	50	30	36	32	16 轻系列
KFACCH-36-36-33OG	M36X2	M33X2	28	O29.2X3.0	33.3	49.8	54	36	41	41	
KFADDH-14-14-12OG	M14X1.5	M12X1.5	6	O09.3X2.4	17.5	32.5	32	14	17	17	63 重系列 S
KFADDH-16-16-14OG	M16X1.5	M14X1.5	8	O11.3X2.4	18.7	33.7	34	16	19	19	
KFADDH-18-18-16OG	M18X1.5	M16X1.5	10	O13.3X2.4	19.5	36	36	19	22	22	
KFADDH-20-20-18OG	M20X1.5	M18X1.5	12	O15.3X2.4	19.5	36	37	19	24	24	
KFADDH-24-24-22OG	M24X1.5	M22X1.5	16	O19.3X2.4	24	42	37.5	24	30	27	
KFADDH-30-30-27OG	M30X2	M27X2	20	O23.5X3.0	28.3	49.8	50	30	36	32	40 重系列 S
KFADDH-36-36-33OG	M36X2	M33X2	25	O29.2X3.0	32.8	56.8	54	36	46	41	
KFADDH-42-42-42OG	M42X2	M42X2	30	O38.5X3.0	36.2	62.7	57.2	41	50	50	
注：1 如需带卡套及卡套螺母整套订货，则请在代号后加"RN",如ACCH-30-30-27OG/RN。 2 G端与ISO 9974-1油口相配，去掉挡圈则与ISO 6149-1油口相配。 Note: 1 In case if you are interested to order the adapter in complete set with cutting ring and nut ,it is necessary to insert suffix "RN" after our part no. , for example ACCH-30-30-27OG/RN. 2 G end is connected with ISO 9974-1 port and connected with ISO 6149-1 port without retaining ring.											